


## White LED Driver CCE7000

### FEATURES

- Vdd 2.4 to 5.5V
- LED drive current up to 60 mA
- High efficiency - low cost
- Constant current regulation
- Over-voltage protection
- Low ripple
- 8L-DFN package
- Other packages on request

### BLOCK DIAGRAM

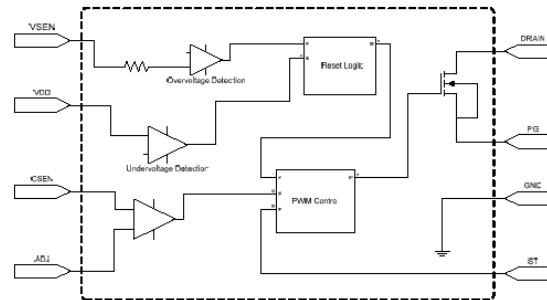

### APPLICATIONS

- Display backlighting (phones, PDAs, digital cameras a.o.)
- Lighting (flashlights, camcorder)
- Automotive (backlights, displays)
- Toys and advertising
- Household appliances


### GENERAL DESCRIPTION

The CCE7000 is a boost converter designed to drive white LEDs. Constant current driving allows connecting the LED in series which leads to uniform brightness of the LEDs and eliminates the ballast resistors. The brightness of the LEDs is controlled by an external voltage at the pin ADJ (CTRL). Assigning this pin to ground will shutdown the circuit. The switching frequency is about 1.2 MHz, allowing the use of very small external components. A low voltage across the current sense resistor minimizes power loss for better efficiency. Lead-free package is also available.

### Absolute Maximum Ratings

Parameter	Value	Unit
ST Pin Voltage	6	V
ADJ Pin Voltage	6	V
DRAIN Pin Voltage	14	V
VDD Pin Voltage	6	V
Operation Temperature	80	°C
Junction Temperature	125	°C
Storage Temperature	150	°C
Lead Temperature	300	°C

### Package Outline



DFN 3mm x 3mm

**Disclaimers:**  
 Creative Chips GmbH reserves the right to make changes without further notice to any products herein to improve reliability, function or design. Creative Chips does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others. These products are not authorized for use as critical components in life support devices or systems without the express written approval of Creative Chips.